

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number  
**WO 2005/040745 A1**

(51) International Patent Classification<sup>7</sup>: **G01L 5/00**  
(21) International Application Number:  
PCT/NL2004/000641

(22) International Filing Date:  
16 September 2004 (16.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
1024372 24 September 2003 (24.09.2003) NL

(71) Applicant (for all designated States except US): **AB SKF**  
[SE/SE]; Hornsgatan 1, S-415 50 Göteborg (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MOL, Hendrik, Anne**  
[NL/NL]; Rijksstraatweg 54, NL-4254 XG Sleetwijk  
(NL).


(74) Agents: **VAN WESTENBRUGGE, Andries et al.**; Ned-  
erlandsch Octrooibureau, Scheveningseweg 82, P.O. Box  
29720, NL-2502 LS The Hague (NL).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: **METHOD AND SENSOR ARRANGEMENT FOR LOAD MEASUREMENT ON ROLLING ELEMENT BEARING  
BASED ON MODEL DEFORMATION**

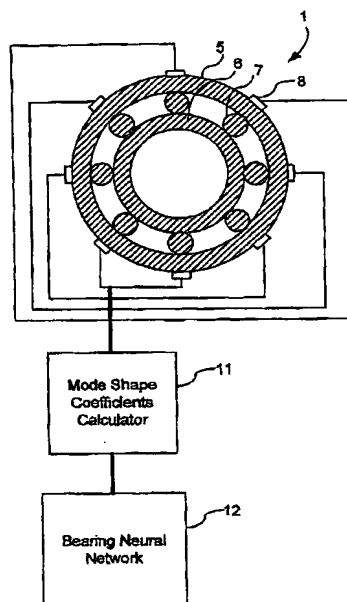

(57) Abstract: Method and sensor arrangement for determining a load vector acting on a rolling element bearing (1) in operation. A plurality of N sensors (8) are provided which measure displacement and/or strain for determining displacement and/or strain in one of the elements (5, 6, 7) of the rolling element bearing (1). Furthermore, a mode shape coefficients calculator (11) is provided, connected to the plurality of N sensors (8), for determining a deformation of the element (5, 6, 7) by calculating amplitude and phase of N/2 Fourier terms representing at least one radial mode shape of the ring shape element (5, 6, 7). Also, a bearing neural network (12) is present, connected to the mode shape coefficients calculator (11), the bearing neural network (12) being trained to provide the load vector on the rolling element bearing (1) from the N/2 Fourier terms.

WO 2005/040745 A1



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*